


BK-1302 Basketball Scoreboard

This indoor/outdoor LED basketball scoreboard provides wireless scoring capabilities, and includes HOME, GUEST, TIME, PERIOD, BONUS/DOUBLE BONUS, POSSESSION ARROW, TEAM FOULS, PLAYER-FOUL, TIME OUTS REMAINING, and individual PLAYER/FOULS/POINTS scoring. An adjustable 8-tone 125dB horn provides clear, audible end-of-period and shot clock notifications. Integrated time-of-day functionality allows the scoreboard to act as a clock when control console is off. Weather-proof digits and electronics are housed in a powder-coated aluminum chassis, which provides excellent corrosion resistance. Scoreboard is shipped as one piece for ease of handling and installation.

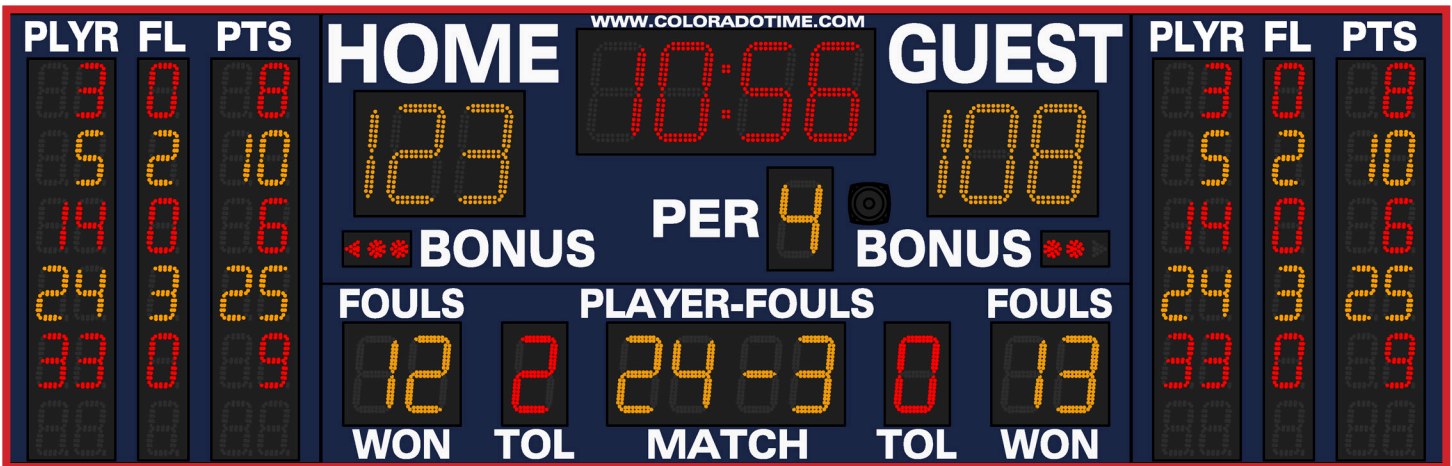

Overall size (W x H x D): 16' x 5' x 4.25" (4.9m x 1.5m x 10.8cm)

Weight: 390 lbs (176.9kg)

Digit sizes: Home, Time, Guest -- 13" (33.0cm)
Per, Fouls, TOL, Player-Fouls -- 10" (25.4cm)
Bonus, Possession -- 2" (5.1cm)
PLYR/FL/PTS -- 7" (17.8cm)

Power: 115VAC~230VAC, 50/60Hz, 450W

Recommended controller:
2.4GHz wireless tabletop controller

www.coloradotime.com



BK-1302 Specifications

CONTROLLER

- Wireless tabletop controller provides integrated 2.4GHz wireless scoring technology, and features an operating distance of up to 1,000 feet. The unit has 12 independent channels and 16 independent networks per channel that provide reliable communication for up to 192 separate games at a facility
- Wired control options are available

CONSTRUCTION & MOUNTING

- Scoreboard is constructed of lightweight, durable, powder-coated 5052 aluminum
- For convenient installation, the display is equipped with four mounting tabs - two on the top and two on the bottom of the scoreboard. Integrated lifting rings are used to hoist the display into place, where it is then secured via bolting or welding
- Various mounting options are available to ensure an efficient installation for different applications

SERVICE ACCESS

- All digits and electronic components are accessed through the front-face of the scoreboard
- Digit covers are secured by quarter-turn slotted studs, which provide quick and convenient access to the electronic components behind them

SIGN PANELS

- Various sign panel options are available - contact your sales representative for more information regarding advertising and identification sign panels

OPERATING TEMPERATURES & PRODUCT SAFETY APPROVAL

- -41 - 131° Fahrenheit (-5 - 55° Celsius)
- CETLus, FCC, CE, and RoHS compliant

CUSTOMIZATION OPTIONS AND ACCESSORIES

- Choose from the following powder-coat color options at no additional cost:



- Custom color matching is available
- Playclocks and auxiliary displays
- Scoreboard border striping
- Striping around individual digit sections
- Multiple caption options
- Shot clocks and backboard lights
- Advertising/identification sign panels
- Decorative accents
- Add-on video display panels of various sizes