


DIGIT #	DIGIT SIZE (IN.)	CABLE LENGTH (FT.)	HEADER	NOTES
8	13	8	DG-8	
9	13	8	DG-9	
1	13	6	DG-1	
2	13	6	DG-2	
3	13	4	DG-3	
4	13	4	DG-4	
10	13	2	DG-10	CONTROL BOARD
11	13	2	DG-11	PATCH ANTENNA
12	2" DOTS	8	DG-12	
7	10	4	DG-7	
13	2" DOTS	4	DG-13	
14	10	10	DG-14	
15	10	10	DG-15	
16	10	8	DG-16	
17	10	6	DG-17	
18	10	6	DG-18	
19	10	6	DG-19	
20	10	6	DG-20	
21	10	6	DG-21	
22	10	4	DG-22	
23	10	4	DG-23	

FOR LOWER-UNIT-ONLY CONFIGURATIONS:


DIGIT #	DIGIT SIZE (IN.)	CABLE LENGTH (FT.)	HEADER	NOTES
14	10	6	DG-8	
15	10	6	DG-9	
16	10	4	-	
17	10	2	DG-1	
18	10	2	DG-2	CONTROL BOARD
19	10	4	DG-3	PATCH ANTENNA
20	10	4	DG-4	
21	10	6	DG-7	
22	10	6	DG-10	
23	10	6	DG-11	

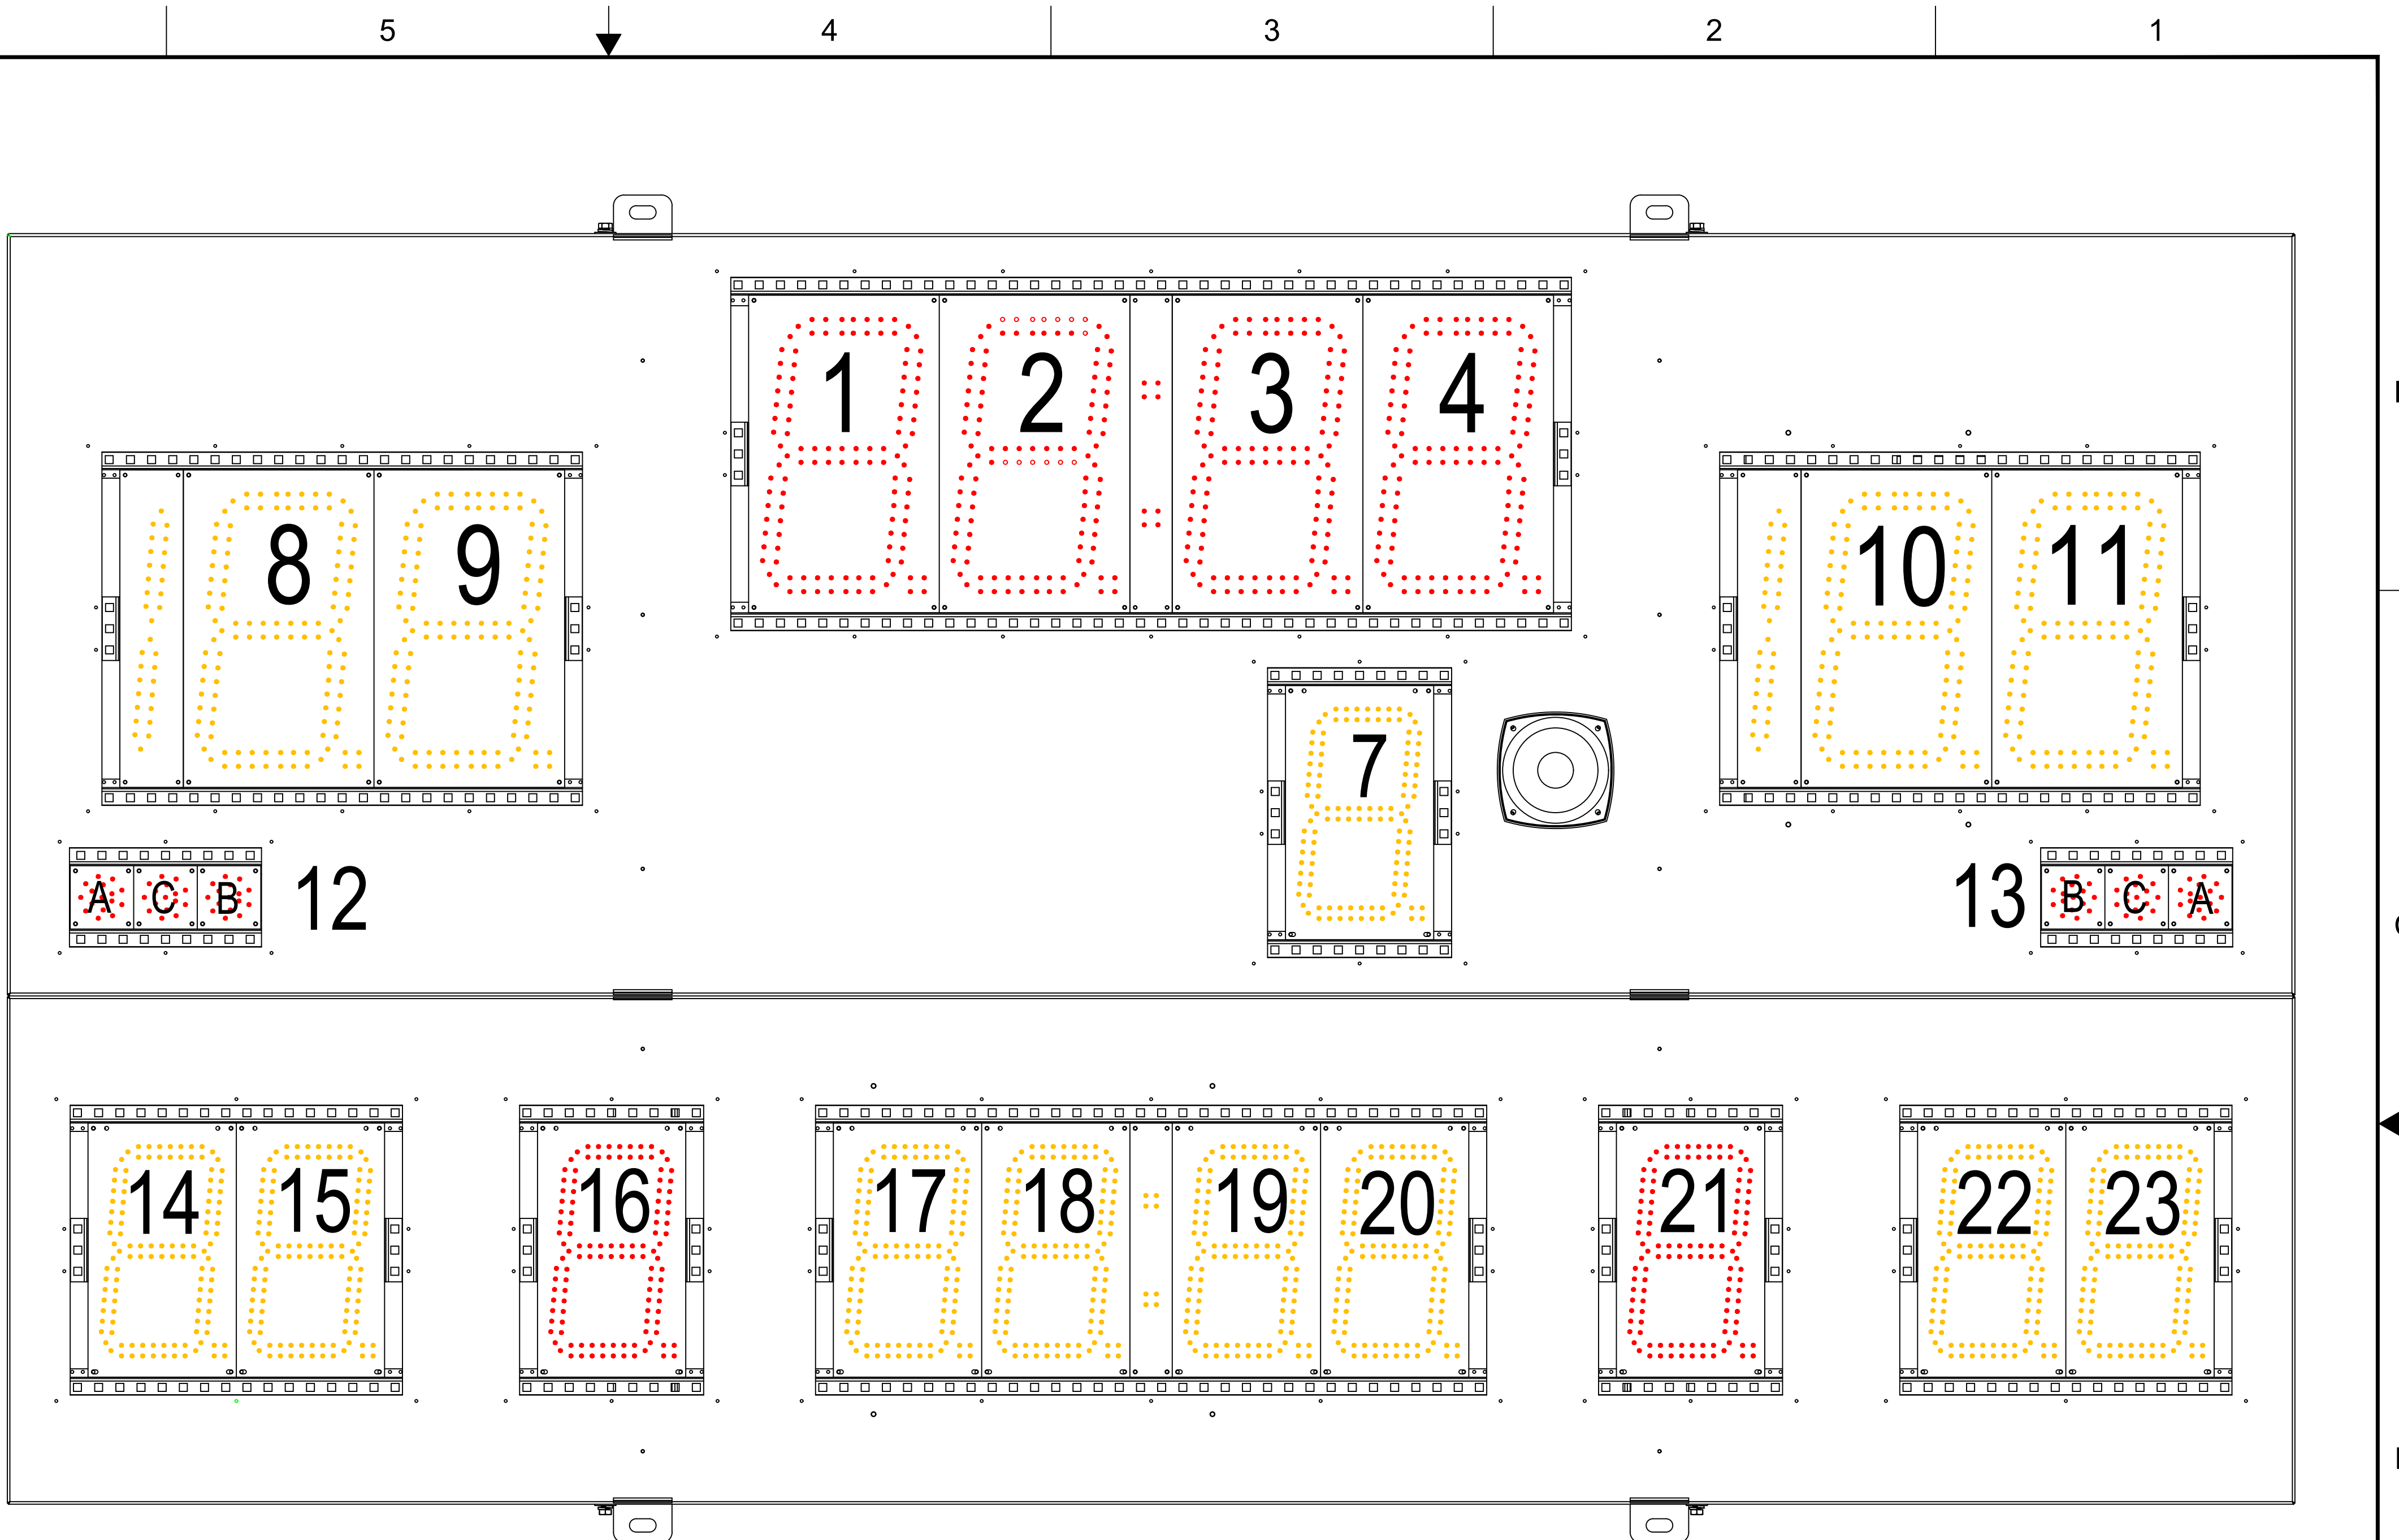

PART #	SCBD SIZE	DIGIT COLOR	NOTES
MS-0001	9' X 3'	RED	
MS-0002	9' X 3'	AMBER	
MS-0003	9' X 3'	MIXED	
MS-0004	9' X 2'	RED	
MS-0005	9' X 2'	AMBER	
MS-0006	9' X 2'	MIXED	
MS-0007	9' X 5'	RED	
MS-0008	9' X 5'	AMBER	
MS-0009	9' X 5'	MIXED	
MS-0091	9' X 3'	RED	NO ONES OR DOTS
MS-0092	9' X 3'	AMBER	NO ONES OR DOTS
MS-0093	9' X 3'	MIXED	NO ONES OR DOTS

- NOTES:
- DOT/ARROWS MUST BE ORIENTED SO THAT THE ARROW POINTS TO THE OUTSIDE OF THE BOARD
  - CONTROL BOARD AND TERMINAL BLOCK ARE LOCATED BEHIND DIGIT INDICATED IN TABLE ABOVE
  - CUT R15 AND R16 ON DIGITS 8, 9, 3, 10, 11, 19
  - DOT A: CUT RESISTORS IN BOXES 2, 3, 4  
DOT B: CUT RESISTORS IN BOXES 1, 3, 4  
DOT C: CUT RESISTORS IN BOXES 1, 2, 4
  - FOR MS-0091,MS-0092,MS-0093:
    - INSTALL (2) R-085-667 DIGIT SPACERS IN PLACE OF "1" DIGITS
    - INSTALL (2) R-5000-0137 WEATHER COVERS OVER SPACES FOR DOTS
  - FOR HOME AND GUEST SCORES, HUNDREDTHS DIGITS ARE CONNECTED TO THE ADJACENT TENS AND ONES DIGITS WITH TWO R-015-544 CABLES; LOWER CONNECTION ON THE ONE TO THE TENS DIGITS, AND HIGHER CONNECTION ON THE ONE TO THE ONES DIGIT. RESISTORS MUST BE CLIPPED AS STATED IN NOTE 3.

UNLESS OTHERWISE SPECIFIED:  
 VARIATIONS IN FORM FOR UNMACHINED FEATURES ARE PERMITTED WITHIN ESTABLISHED COMMERCIAL STANDARDS. ALL EDGES AND CORNERS 0.005-0.020 (APPROX RADIUS OR CHAMFER). ALL FILETS 0.005-0.020 (APPROX RADIUS). SCREW THREADS PER ANSI B1.1 - PIPE THREADS PER ANSI B1.1 - SURFACE ROUGHNESS PER ANSI B46.1 - SURFACE ROUGHNESS ON HOLES 250 MAX

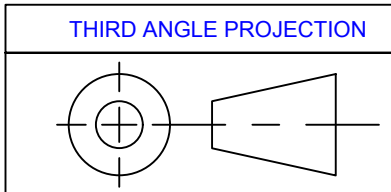

REV	DESCRIPTION	ECO/PCO #	DATE	APPROVED
A5	NOTE 6 ADDED (NUM 1 DIGIT CONNECTION)		5161 12/01/2017	VAB
A4	EDIT PATCH ANTENNA LOCATION		4727 9/16/14	PJS
A3	CORRESPONDING DIGIT # WITH HEADER#		4692 6/9/14	PJS
A2	DIM. NOTE CORRECTIONS FOR MS-0091,92,93		4655 5/20/14	PJS
A1	RELEASE FOR INFORMATION		4539 8/5/13	ERS
A	RELEASE FOR INFORMATION		2/11/13	ERS

ALL DIMS IN INCHES UNLESS OTHERWISE NOTED	DRAWN BY P.SCHIEL	DATE
INCH [MM] 1 INCH = 25.4MM	ENG. APPROVAL	
TOLERANCES EXCEPT AS NOTED	PROJECT ENG.	
INCHES X ± 0.02 XX ± 0.02 XXX ± 0.005	MM X ± XX ±	
ANGLES ± 1°		
MATERIAL SEE BILL OF MATERIAL		
FINISH		

DO NOT SCALE THIS DRAWING

**TRADE SECRET**

Colo Colo systems 1201 E. 11th St. Loveland, CO 80537 P: (970) 667-1000 F: (970) 667-5876

TITLE 13" TEAM SPORT DISPLAY 10" PER AUX DIGITS ASSEMBLY DETAILS

SIZE D	DRAWING NUMBER S2013-001-010	REV. A5
SCALE N.T.S.	SHEET 1 OF 1	