



DIGIT #	DIGIT SIZE (IN.)	CABLE LENGTH (FT.)	HEADER	PATCH ANTENNA	AMBIENT LIGHT SENSOR
8	10	4	DG-8		
9	10	2	DG-9		
1	10	2	DG-1		X
2	10	2	DG-2	X	
3	10	2	DG-3		
4	10	2	DG-4		
10	10	4	DG-10		
11	10	4	DG-11		
12	2" DOTS	4	DG-12		
7	7	2	DG-7		
13	2" DOTS	4	DG-13		

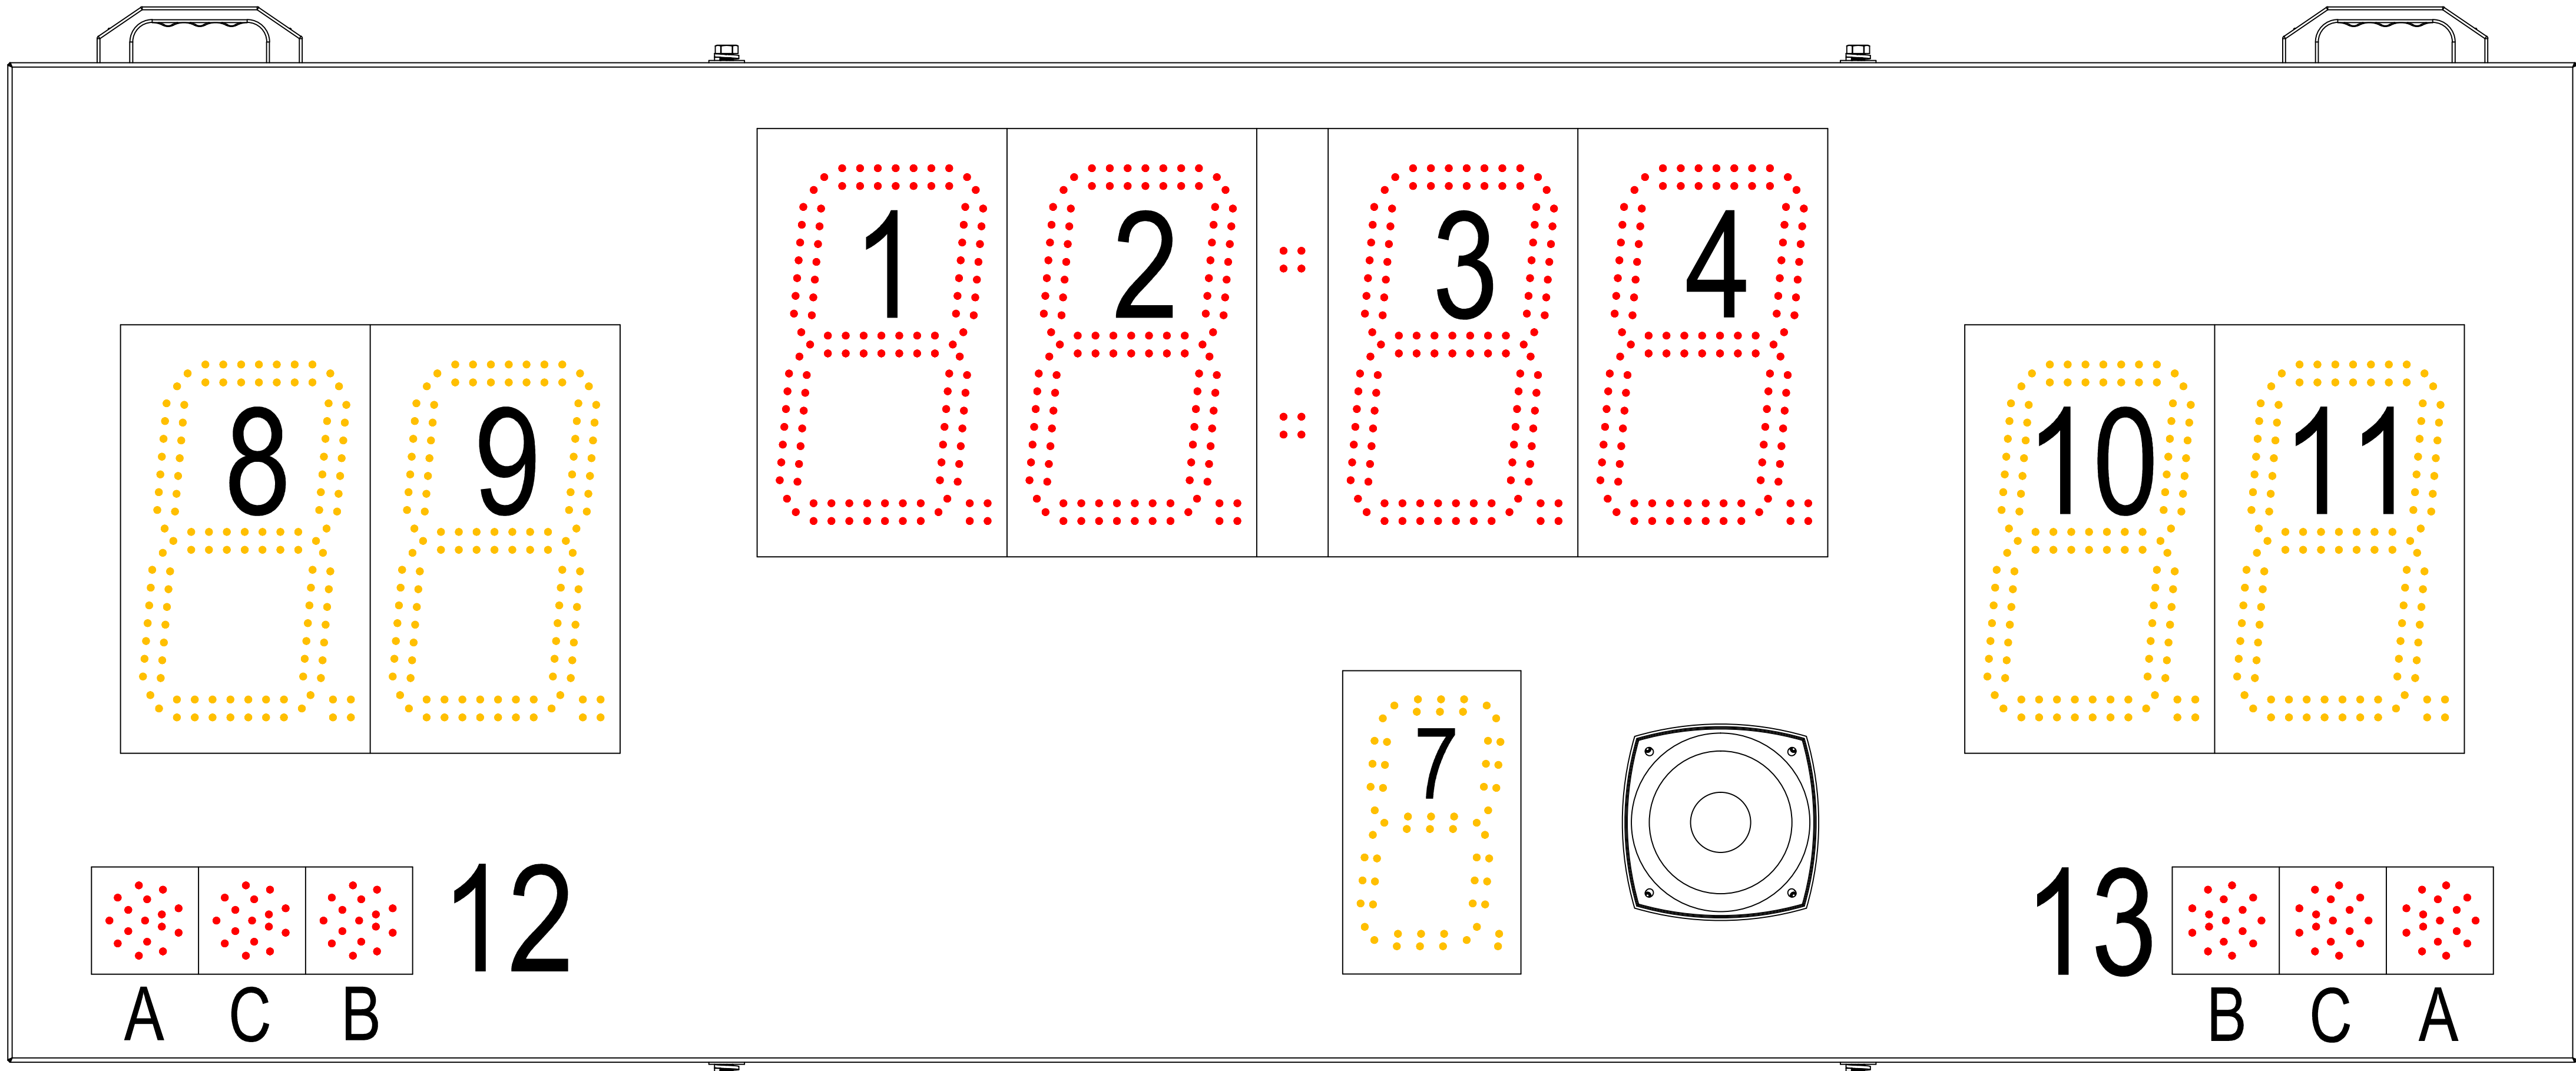

PART #	SCBD SIZE	DIGIT COLOR	DOTS	BATTERIES
MS-0028	6' X 2'4"	RED	X	
MS-0029	6' X 2'4"	AMBER	X	
MS-0030	6' X 2'4"	MIXED	X	
MS-0031	6' X 2'4"	RED	X	X
MS-0032	6' X 2'4"	AMBER	X	X
MS-0033	6' X 2'4"	MIXED	X	X
MS-0034	6' X 2'4"	RED	X	X
MS-0035	6' X 2'4"	AMBER	X	X
MS-0036	6' X 2'4"	MIXED	X	X

- NOTES:
1. DOT/ARROWS MUST BE ORIENTED SO THAT THE ARROW POINTS TO THE OUTSIDE OF THE BOARD
 2. CONTROL BOARD AND TERMINAL BLOCK ARE LOCATED BEHIND DIGIT CONTAINING PATCH ANTENNA, AS INDICATED IN TABLE ABOVE
 3. CUT R15 AND R16 ON DIGITS 3,8,9,10,11
 4. DOT A: CUT RESISTORS IN BOXES 2, 3, 4
DOT B: CUT RESISTORS IN BOXES 1, 3, 4
DOT C: CUT RESISTORS IN BOXES 1, 2, 4

REV	DESCRIPTION	ECO/PCO #	DATE	APPROVED	
B3	ADD AMBIENT LIGHT SENSOR		4756	3/18/15	PJS
B2	MATCH DIGIT # WITH HEADER #		4804	2/6/15	PJS
B1	SHORTER DIGIT CABLES FOR DIGITS 1, 2, 6, 10, 11		4548	11/07/13	MMB
B	CUT RESISTORS ON SCORE DIGITS			4/29/13	ERS
A	RELEASE FOR INFORMATINO			2/13/13	ERS

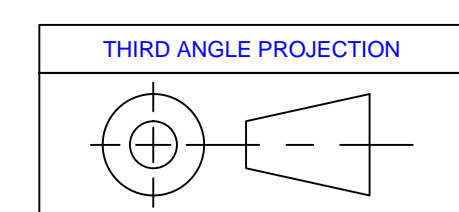

ALL DIMS IN INCHES UNLESS OTHERWISE NOTED
INCH [MM] 1 INCH = 25.4MM
TOLERANCES EXCEPT AS NOTED

INCHES	MM
X ± 0.02	X ±
XX ± 0.02	.XX ±
XXX ± 0.005	

ANGLES ± 1 °

MATERIAL SEE BILL OF MATERIAL
FINISH

UNLESS OTHERWISE SPECIFIED:
VARIATIONS IN FORM FOR UNMACHINED FEATURES ARE PERMITTED WITHIN ESTABLISHED COMMERCIAL STANDARDS. ALL EDGES AND CORNERS 0.005-0.020 (APPROX RADIUS OR CHAMFER). ALL FILETS 0.005-0.020 (APPROX RADIUS). SCREW THREADS PER ANSI B1.1 - PIPE THREADS PER ANSI B1.1 - SURFACE ROUGHNESS PER ANSI B46.1 - SURFACE ROUGHNESS ON HOLES 250 MAX

TRADE SECRET

10" TEAM DISPLAY
7"PER DOT
ASSEMBLY DETAILS

SIZE D DRAWING NUMBER S2013-001-013 REV. B3
SCALE N.T.S. SHEET 1 OF 1