



# Wireless Tabletop Controller Firmware Update

## Required items


Windows PC 7 SP1 or greater w/ .Net framework 4.5

USB A to USB Micro B cable or USB A to USB B (provided with WTTC)


WTTC

1. Use the link below to download the firmware updater package which includes the 2.0.8 firmware for the WTTC device.


<https://www.coloradotime.com/support-overview/installation-methods>. Once the webpage is open, select the **Multi Sport** tab and click on the download for **WTTC Firmware**.

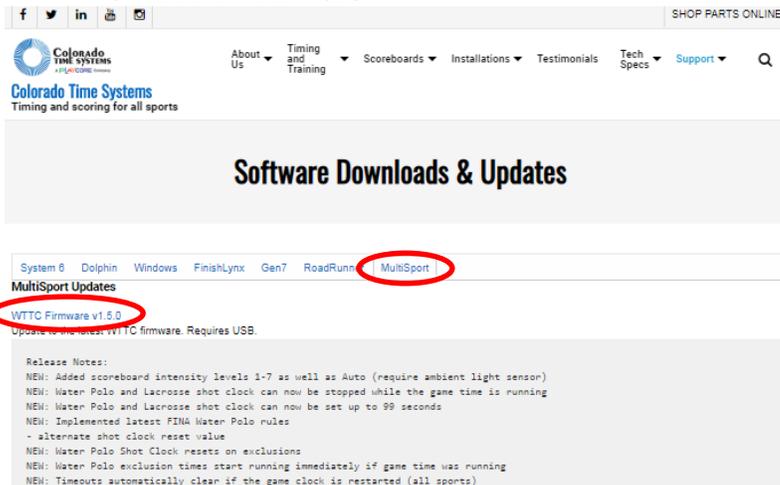


2. If a download page similar to the one pictured below opens, click **Download** then proceed to step 4.

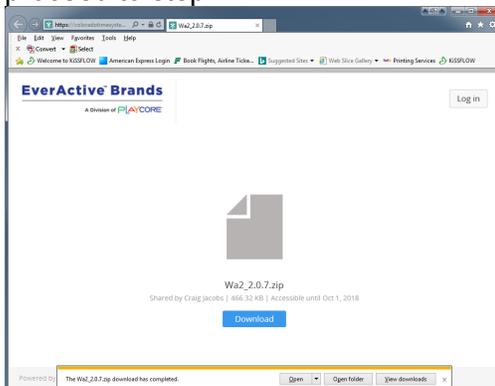

3. Save the Zip file to a location you will remember.
4. Once downloaded, find the file you just downloaded, right click on the icon and click **Extract All**.

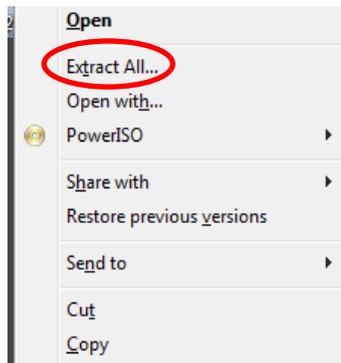


5. In the “Extract Compressed (Zipped) Folders” window; accept the default location and click the **Extract** button.

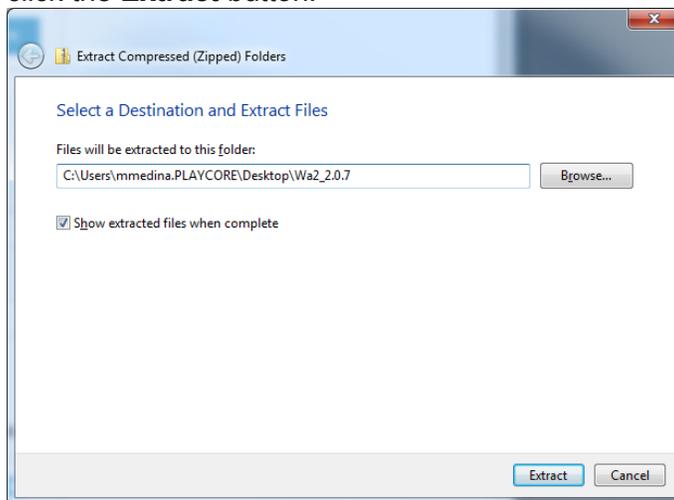

6. If not already connected, connect the computer to the internet (this helps with automatic download of drivers and software frameworks).
7. Plug the WTTC into your computer with the appropriate USB cable.
8. Turn on the controller and leave it at the “Installed Sports” menu; do not enter any sport.
9. Wait a few seconds for the drivers to install.
10. On the computer; run the extracted program called “MultiSport Reprogrammer”.



11. If an “Open File – Security Warning” box appears, click **Run**.

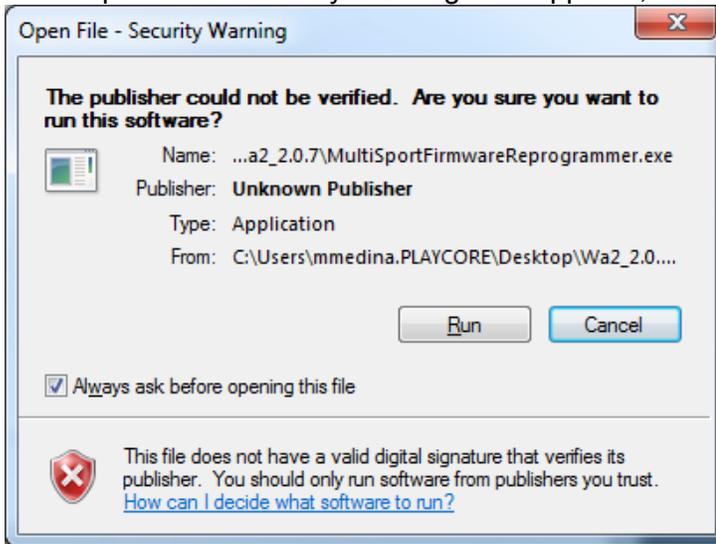

12. Click the **Scan For Devices** button.



13. You will see the TableTop controller popup in the list.



14. Highlight the connected controller then click the **Upload Firmware** button.




15. Locate the new firmware file and click **Open**.



Name	Date modified	Type	Size
TableTop_1.5.0.fwp	7/30/2019 10:29 AM	FWP File	524 KB



16. A dialog box appears asking if you want to proceed with the firmware upload. Click **Yes**.

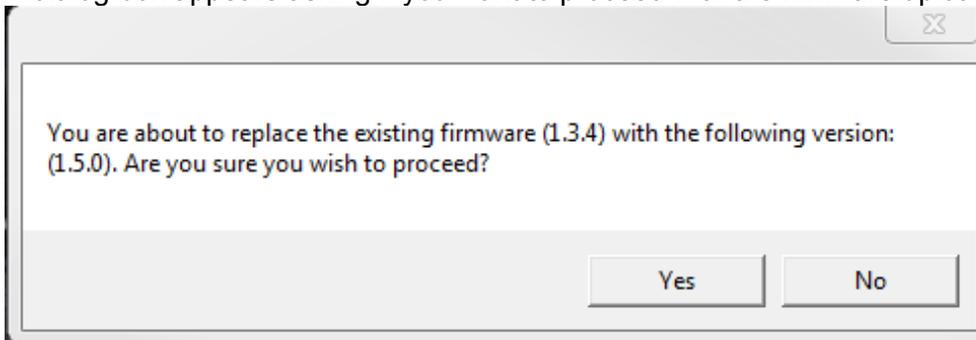


17. The WTTC-1 will say "Starting Firmware Update."

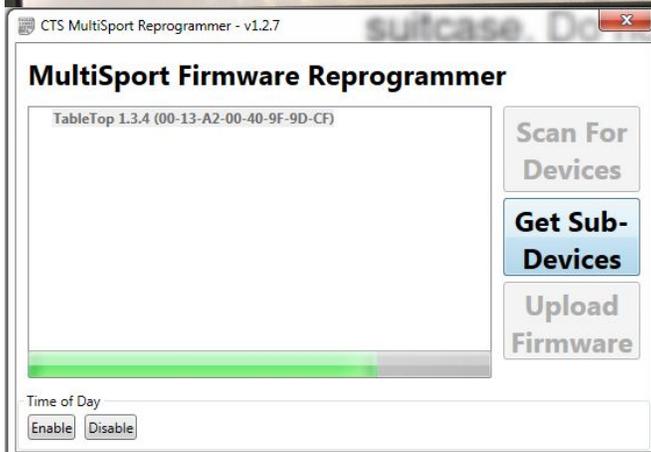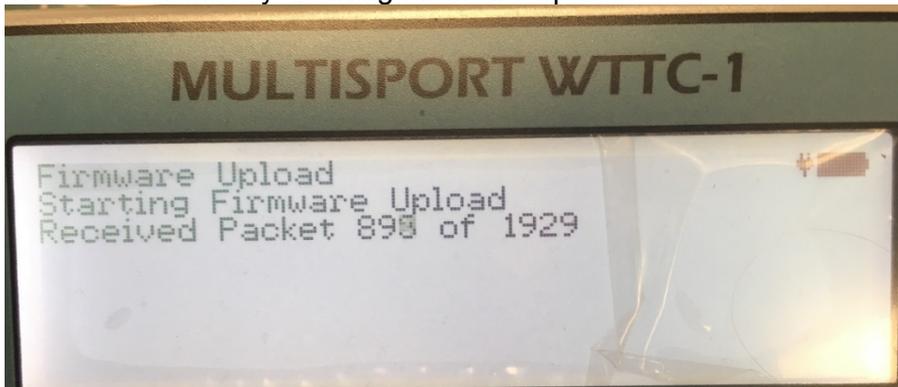

18. The process will complete in about 60 seconds and the WTTC will automatically reboot. A message appears stating that the firmware is successfully updated. Click OK. (The WTTC has already been power cycled.)



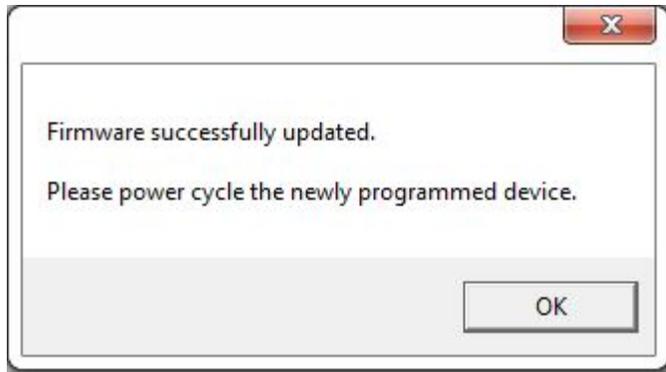

19. Disconnect the USB cable. Update complete.

