


## Brackets for Stark Bulkheads For Touchpads without Mounting Holes

1. Slide brackets onto top lip of touchpad. Hold in place while alternately tightening the two screws on the top using the 7/32" hex key included with your order. Fully tighten bracket screws to secure bracket firmly in place.



Use two brackets per pad for touchpads up to 77 inches (200cm) wide; use three brackets per pad for TP-78 and wider touchpads, or for higher level competition in which the athletes are likely to exert greater force in their turns. Touchpads can be stored with brackets attached. When using a touchpad caddy, mount the brackets so that they won't bump into the support trees on the caddy.

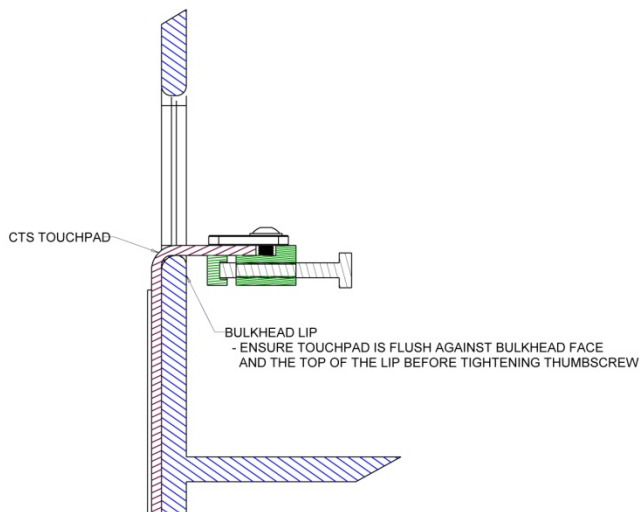

2. Place touchpad in pool. Ensure that touchpad is flush against the bulkhead face and the top of the bulkhead lip. Tighten thumbscrew to secure the touchpad in place.